



'Compact' ball valves

female threaded outlet - PE 1

ITEM 570

REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	Gross weight	Unidades lote
111C040	GFPP COMP.B.VALV. PE- F/THEADED OUTLET 20-1/2"	0.122	0.008918	2.605	20
111C041	GFPP COMP.B.VALV PE- FEMALE THREADED OUTLET 25-3/4"	0.149	0.008918	3.12	20
111C042	PE- FEMALE THREADED OUTLET 32-1"	0.249553	0.015532	4.07	15
111C043	PE- FEMALE THREADED OUTLET 40-1 1/4"	0.381	0.022435	6.203	15
111C044	PE- FEMALE THREADED OUTLET 50-1 1/2"	0.5665	0.031294	6.238	10
111C045	GFPP COMP.B.VALV. PE- F/THEADED OUTLET 63-2"	1.01566	0.02243	5.566	5



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62




tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es

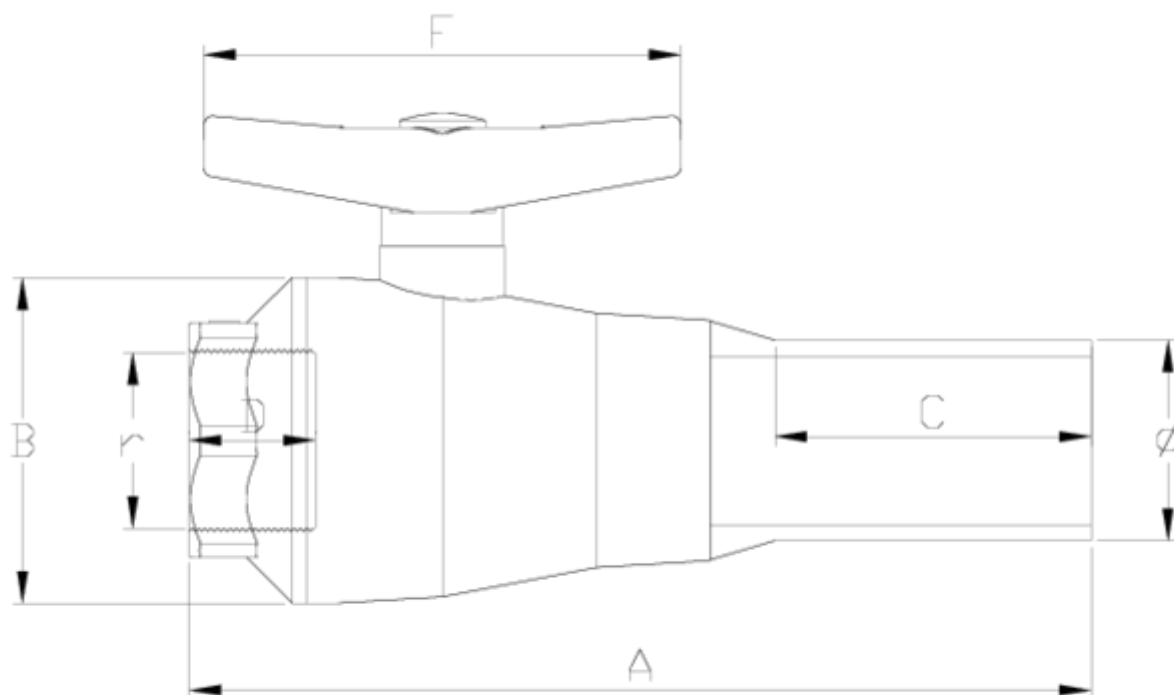

ITEM 570 | female threaded outlet - PE 1

PESO (g)	CÓDIGO	d-r	DN	A	B	C	D	F	PN	TIPO ROSCA
118.58	11C040	20-1/2"	15	152	48	65	17	80	PN16	BSP
149.38	11C041	25-3/4"	20	159	53	65	20	80	PN16	BSP
242.55	11C042	32-1"	25	176	59	70	23	101	PN16	BSP
415.8	11C043	40-1 1/4"	32	192	69	70	26	130	PN16	BSP
628.32	11C044	50-1 1/2"	40	225	83	79	33	130	PN16	BSP
1004.08	11C045	63-2"	50	256	104	89	39	172	PN16	BSP



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es



Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es