



## Electrofusion fittings/Welding fittings

# Injected 45° elbow

## ITEM 426

| REFERENCE | DESCRIPTION            | Net weight | Volumen (m <sup>3</sup> ) | Gross weight | Unidades lote |
|-----------|------------------------|------------|---------------------------|--------------|---------------|
| 1019505   | INJECTED 45° ELBOW 63  | 0.179489   | 0.036816                  | 3.78         | 18            |
| 1019506   | INJECTED 45° ELBOW 75  | 0.346879   | 0.03682                   | 6.905        | 18            |
| 1019507   | INJECTED 45° ELBOW 90  | 0.6        | 0.047171                  | 10.36        | 16            |
| 1019508   | INJECTED 45° ELBOW 110 | 0.837706   | 0.086775                  | 14.425       | 16            |
| 1019509   | INJECTED 45° ELBOW 125 | 1.016625   | 0.061499                  | 13.12        | 12            |
| 1019510   | INJECTED 45° ELBOW 140 | 1.429375   | 0.086775                  | 12.11        | 8             |
| 1019511   | INJECTED 45° ELBOW 160 | 1.879525   | 0.04879                   | 8.795        | 4             |
| 1019512   | INJECTED 45° ELBOW 180 | 3.362025   | 0.063473                  | 14.235       | 4             |
| 1019513   | INJECTED 45° ELBOW 200 | 4.4623     | 0.03129                   | 4.925        | 1             |
| 1019514   | INJECTED 45° ELBOW 225 | 6.73       | 0                         | 6.73         | 1             |
| 1019515   | INJECTED 45° ELBOW 250 | 5.814      | 0                         | 5.814        | 1             |



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62




tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es

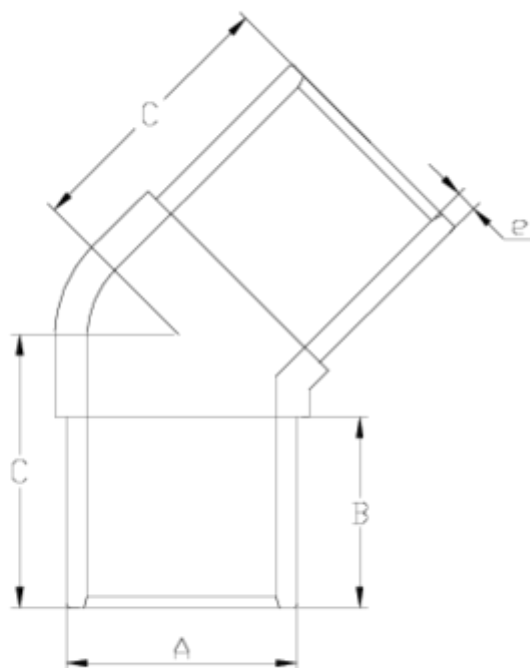

## ITEM 426 | Injected 45° elbow

| Código | f tubo-A | Peso (g) | B   | C   | e    | PN   | MEDIDA  |
|--------|----------|----------|-----|-----|------|------|---------|
| 19505  | 63       | 300      | 56  | 82  | 5.8  | PN16 | MÉTRICO |
| 19506  | 75       | 346      | 75  | 96  | 6.8  | PN16 | MÉTRICO |
| 19507  | 90       | 578      | 84  | 120 | 8.2  | PN16 | MÉTRICO |
| 19508  | 110      | 931      | 91  | 129 | 10   | PN16 | MÉTRICO |
| 19509  | 125      | 1286     | 101 | 147 | 11.4 | PN16 | MÉTRICO |
| 19510  | 140      | 1600     | 104 | 153 | 12.7 | PN16 | MÉTRICO |
| 19511  | 160      | 2461     | 113 | 169 | 14.6 | PN16 | MÉTRICO |
| 19512  | 180      | 3283     | 120 | 186 | 16.4 | PN16 | MÉTRICO |
| 19513  | 200      | 4371     | 127 | 201 | 18.2 | PN16 | MÉTRICO |
| 19514  | 225      | 6013     | 134 | 218 | 20.5 | PN16 | MÉTRICO |





## ITEM 426 | Injected 45° elbow

|       |     |      |     |     |      |      |         |
|-------|-----|------|-----|-----|------|------|---------|
| 19515 | 250 | 8541 | 155 | 217 | 22.7 | PN16 | MÉTRICO |
|-------|-----|------|-----|-----|------|------|---------|



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



[www.hidroten.es](http://www.hidroten.es)



## Product Documents



## Product Certificates

## Company Certificates



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es