




## 'Basic' ball valves

# Plain/Threaded outlet - PE - Basic System ITEM 209



| REFERENCE | DESCRIPTION                             | Net weight | Volumen (m <sup>3</sup> ) | Gross weight | Unidades lote |
|-----------|-----------------------------------------|------------|---------------------------|--------------|---------------|
| 1011083   | BALL VALVE SOLV. S./FEM. THR. 20-1/2"   | 0.160583   | 0.015532                  | 6.75         | 40            |
| 1011084   | BALL VALVE SOLV. S./FEM. THR. 25-3/4"   | 0.203183   | 0.022435                  | 8.615        | 40            |
| 1011085   | BALL VALVE SOLV. S./FEM. THR. 32-1"     | 0.350733   | 0.031294                  | 11.095       | 30            |
| 1011086   | BALL VALVE SOLV. S./FEM. THR. 40-1 1/4" | 0.6041     | 0.031294                  | 12.655       | 20            |
| 1011087   | BALL VALVE SOLV. S./FEM. THR. 50-1 1/2" | 0.8658     | 0.031294                  | 13.56        | 15            |
| 1011088   | BALL VALVE SOLV. S./FEM. THR. 63-2"     | 1.35108    | 0.036816                  | 14.06        | 10            |
| 1011089   | BALL VALVE SOLV. S./FEM. THR. 75-2 1/2" | 2.7587     | 0.031294                  | 11.608       | 4             |
| 1011090   | BALL VALVE SOLV. S./FEM. THR. 90-3"     | 4.40365    | 0.022435                  | 9.295        | 2             |
| 1011697   | BALL VALVE SOLV. S./FEM. THR. 110-4"    | 6.24       | 0.044603                  | 13.32        | 2             |



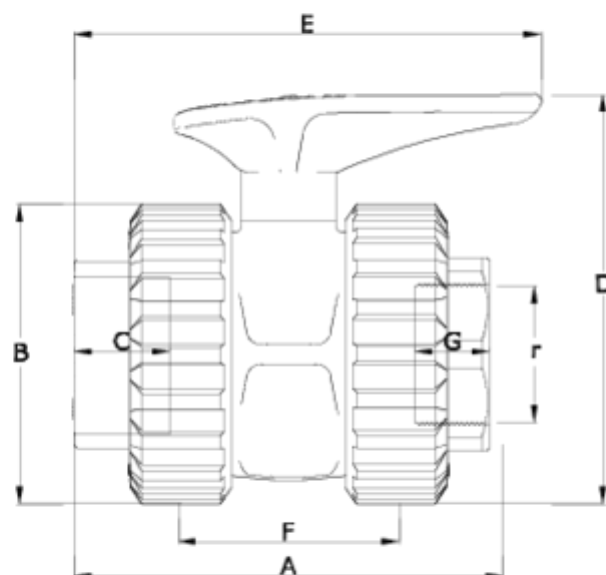

## ITEM 209 | Plain/Threaded outlet - PE - Basic System

| CÓDIGO | f-r       | DN  | PESO (g) | A   | B   | C  | D   | E   | F   | G  | PN   | TIPO ROSCA |
|--------|-----------|-----|----------|-----|-----|----|-----|-----|-----|----|------|------------|
| 11083  | 20-1/2"   | 15  | 160      | 89  | 52  | 16 | 78  | 92  | 47  | 17 | PN16 | BSP        |
| 11084  | 25-3/4"   | 20  | 203      | 99  | 59  | 19 | 84  | 92  | 51  | 20 | PN16 | BSP        |
| 11085  | 32-1"     | 25  | 350      | 119 | 70  | 23 | 97  | 138 | 66  | 23 | PN16 | BSP        |
| 11086  | 40-1 1/4" | 32  | 604      | 133 | 84  | 25 | 128 | 160 | 72  | 26 | PN16 | BSP        |
| 11087  | 50-1 1/2" | 40  | 865      | 151 | 99  | 31 | 142 | 169 | 77  | 33 | PN16 | BSP        |
| 11088  | 63-2"     | 50  | 1351     | 167 | 121 | 38 | 165 | 188 | 90  | 29 | PN16 | BSP        |
| 11089  | 75-2 1/2" | 65  | 2649     | 210 | 151 | 45 | 222 | 281 | 121 | 33 | PN10 | BSP        |
| 11090  | 90-3"     | 80  | 4403     | 245 | 175 | 51 | 244 | 301 | 141 | 36 | PN10 | BSP        |
| 11697  | 110-4"    | 100 | 6240     | 288 | 210 | 61 | 307 | 426 | 155 | 42 | PN10 | BSP        |



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es



## Product Documents



## Product Certificates

## Company Certificates



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es