



PVC check valves (with spring)

Reinforced female threaded outlet - Foot - EPDM seal ITEM 600



REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	Gross weight	Unidades lote
1016350	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.1/2"	0.132	0.015532	5.36	40
1016351	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.3/4"	0.195	0.022435	6.98	40
1016352	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.1"	0.302	0.022435	8.46	30
1016353	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.1 1/4"	0.462	0.031294	9.56	20
1016354	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.1 1/2"	0.682	0.022435	8.724	12
1016355	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.2"	1.107	0.022435	13.44	12
1016356	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.2 1/2"	2.13	0.031294	9.135	4
1016357	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.3"	3.343	0.031294	8.17	2



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62




tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es

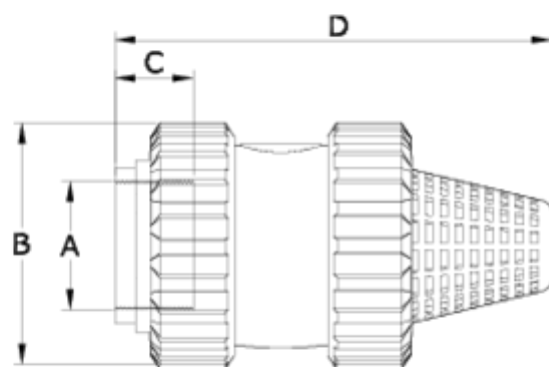

ITEM 600 | Reinforced female threaded outlet - Foot - EPDM seal

Código EPDM	A	Peso	B	C	D	PN	TIPO ROSCA
16350	1/2"	137	52	16	106	PN16	BSP
16351	3/4"	175	59	17	118	PN16	BSP
16352	1"	285	69	21	147	PN16	BSP
16353	1 1/4"	462	85	23	164	PN16	BSP
16354	1 1/2"	700	99	31	175	PN16	BSP
16355	2"	1096	116	38	200	PN16	BSP
16356	2 1/2"	2425	150	44	260	PN10	BSP
16357	3"	4150	178	52	303	PN10	BSP





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es