



Válvulas de bola 'Basic' bidireccional

## Salida mixta actuador neumático simple efecto - FPM

ITEM 674



| REFERENCIA | DESCRIPCIÓN                          | Peso neto | Volumen (m³) | Peso bruto | Unidades lote |
|------------|--------------------------------------|-----------|--------------|------------|---------------|
| 111D580    | V.B.BID.ACT.N S/E S/MIXTA 1/2" FPM   | 1.6115    | 0.01553      | 1.9382     | 1             |
| 111D581    | V.B.BID.ACT.N S/E S/MIXTA 3/4" FPM   | 1.6715    | 0.02243      | 2.1592     | 1             |
| 111D582    | V.B.BID.ACT.N S/E S/MIXTA 1" FPM     | 1.8454    | 0.03129      | 2.4184     | 1             |
| 111D583    | V.B.BID.ACT.N S/E S/MIXTA 1 1/4" FPM | 2.699     | 0.03129      | 3.272      | 1             |
| 111D584    | V.B.BID.ACT.N S/E S/MIXTA 1 1/2" FPM | 3.075     | 0.03129      | 3.648      | 1             |
| 111D585    | V.B.BID.ACT.N S/E S/MIXTA 2" FPM     | 3.622     | 0.03648      | 4.216      | 1             |
| 111D586    | V.B.BID.ACT.N S/E S/MIXTA 2 1/2" FPM | 5.678     | 0.0446       | 0          | 1             |
| 111D587    | V.B.BID.ACT.N S/E S/MIXTA 3" FPM     | 11.54     | 0.0446       | 0          | 1             |



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62




tecnicocomercial@hidroten.es



Servicio Atención  
Técnica comercial  
+ 34 966 105 888



www.hidroten.es

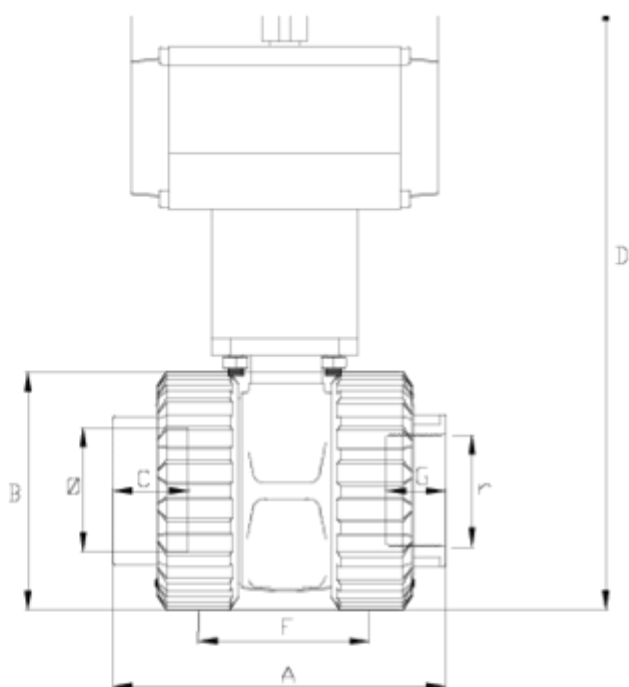


## ITEM 674 | Salida mixta actuador neumático simple efecto - FPM

| CÓDIGO | f - r     | Actuador | PESO (g) | DN | A   | B   | C  | D   | E   | F   | G  | PN   | TIPO ROSCA |
|--------|-----------|----------|----------|----|-----|-----|----|-----|-----|-----|----|------|------------|
| 11D580 | 20-1/2"   | H050SE   | 1384.8   | 15 | 86  | 55  | 16 | 192 | 138 | 44  | 17 | PN16 | BSP        |
| 11D581 | 25-3/4"   | H050SE   | 1428.92  | 20 | 99  | 62  | 19 | 197 | 138 | 49  | 20 | PN16 | BSP        |
| 11D582 | 32-1"     | H050SE   | 1562.25  | 25 | 122 | 72  | 23 | 208 | 138 | 66  | 23 | PN16 | BSP        |
| 11D583 | 40-1 1/4" | H063SE   | 2421     | 32 | 131 | 88  | 25 | 248 | 155 | 71  | 26 | PN16 | BSP        |
| 11D584 | 50-1 1/2" | H063SE   | 2713.92  | 40 | 155 | 103 | 31 | 265 | 155 | 75  | 33 | PN16 | BSP        |
| 11D585 | 63-2"     | H063SE   | 3234.4   | 50 | 180 | 120 | 38 | 307 | 155 | 89  | 29 | PN16 | BSP        |
| 11D586 | 75-2 1/2" | H075SE   | 6050     | 65 | 202 | 150 | 45 | 376 | 210 | 119 | 33 | PN10 | BSP        |
| 11D587 | 90-3"     | H100SE   | 11110    | 80 | 245 | 181 | 51 | 426 | 280 | 140 | 36 | PN10 | BSP        |





## Documentación de Producto



## Certificados de Producto

## Certificados de Empresa



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Servicio Atención  
Técnica comercial  
+ 34 966 105 888



www.hidroten.es