




## Vannes à boisseau 3 voies 'Security'

# SORTIE TARAUDÉE MOTEUR ÉLECTRIQUE 220V. - FPM ITEM 862

| RÉFÉRENCE | DESCRIPTION                                                          | Poids net | Volume (m <sup>3</sup> ) | Poids brut | Unités par lot |
|-----------|----------------------------------------------------------------------|-----------|--------------------------|------------|----------------|
| 111V513   | VÁLVULA BOLA 3 VÍAS ACTUADOR ELECTRICO MODELO "L" S/R/H 1" VITON     | 0         | 0.0446                   | 0          | 1              |
| 111V515   | VÁLVULA BOLA 3 VÍAS ACTUADOR ELECTRICO MODELO "L" S/R/H 1 1/2" VITON | 3.4964    | 0.0446                   | 4.1622     | 1              |
| 111V516   | VÁLVULA BOLA 3 VÍAS ACTUADOR ELECTRICO MODELO "L" S/R/H 2" VITON     | 4.439     | 0.0446                   | 5.1048     | 1              |
| 111V517   | VÁLVULA BOLA 3 VÍAS ACTUADOR ELECTRICO MODELO "L" S/R/H 2 1/2" VITON | 7.3559    | 0.06149                  | 8.1994     | 1              |
| 111V553   | VÁLVULA BOLA 3 VÍAS ACTUADOR ELECTRICO MODELO "T" S/R/H 1" VITON     | 0         | 0.0446                   | 0          | 1              |
| 111V555   | VÁLVULA BOLA 3 VÍAS ACTUADOR ELECTRICO MODELO "T" S/R/H 1 1/2" VITON | 3.4964    | 0.0446                   | 4.1622     | 1              |
| 111V556   | VÁLVULA BOLA 3 VÍAS ACTUADOR ELECTRICO MODELO "T" S/R/H 2" VITON     | 4.439     | 0.0446                   | 5.1048     | 1              |
| 111V557   | VÁLVULA BOLA 3 VÍAS ACTUADOR ELECTRICO MODELO "T" S/R/H 2 1/2" VITON | 7.3559    | 0.06149                  | 8.1994     | 1              |



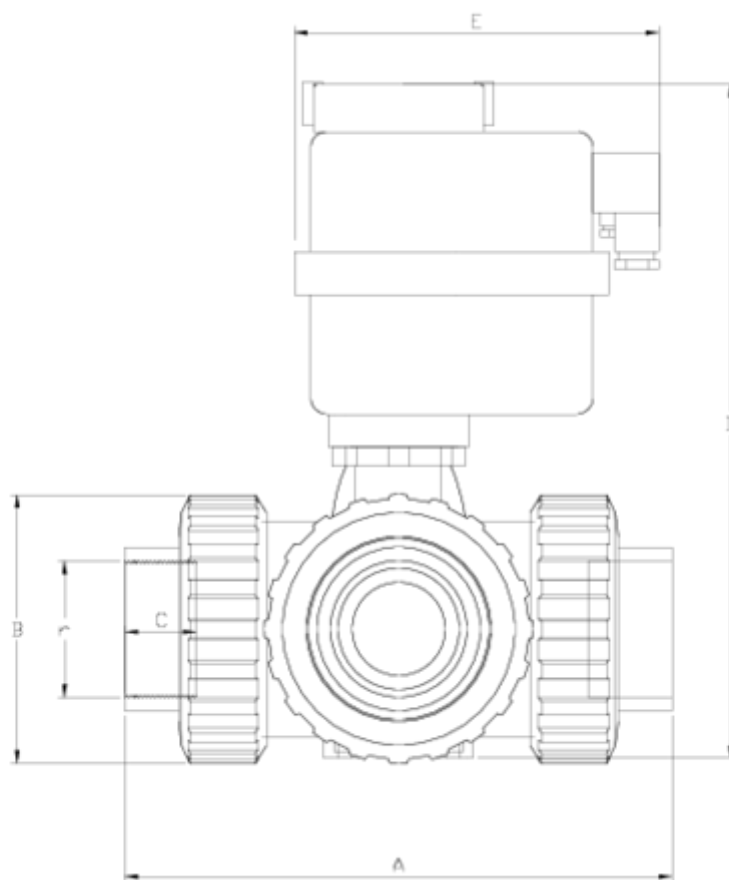

## ITEM 862 | SORTIE TARAUDÉE MOTEUR ÉLECTRIQUE 220V. - FPM

| VITON  | r      | Actuador | PESO (g) | DN | Modelo | A   | B   | C  | D   | E   | PN   | TIPO ROSCA |
|--------|--------|----------|----------|----|--------|-----|-----|----|-----|-----|------|------------|
| 11V513 | 1"     | H10      | 1636     | 25 | L      | 162 | 72  | 23 | 220 | 169 | PN16 | BSP        |
| 11V515 | 1 1/2" | H20      | 3531     | 40 | L      | 210 | 103 | 33 | 279 | 177 | PN16 | BSP        |
| 11V516 | 2"     | H35      | 4518     | 50 | L      | 261 | 120 | 29 | 318 | 177 | PN16 | BSP        |
| 11V517 | 2 1/2" | H55      | 7513     | 65 | L      | 322 | 150 | 33 | 384 | 177 | PN10 | BSP        |
| 11V553 | 1"     | H10      | 1632     | 25 | T      | 162 | 72  | 23 | 220 | 169 | PN16 | BSP        |
| 11V555 | 1 1/2" | H20      | 3521     | 40 | T      | 210 | 103 | 33 | 279 | 177 | PN16 | BSP        |
| 11V556 | 2"     | H35      | 4500     | 50 | T      | 261 | 120 | 29 | 318 | 177 | PN16 | BSP        |
| 11V557 | 2 1/2" | H55      | 7473     | 65 | T      | 322 | 150 | 33 | 384 | 177 | PN10 | BSP        |





## Documentation Produit



## Certifications de produits

## Certificats d'entreprise



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Service d'Attention  
Technique Commerciale  
+34 966 105 888



www.hidroten.es