




Eletrofusão / Soldadura por topo

Adaptador de transición R/M

ITEM 167


REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
1019201	ADAPTADOR TRANSICION R/M 20-1/2"	0.081052	0.00891	4.24	50
1019202	ADAPTADOR TRANSICION R/M 25-3/4"	0.113846	0.022435	6.18	50
1019203	ADAPTADOR TRANSICION R/M 32-1"	0.179346	0.022435	9.455	50
1019204	ADAPTADOR TRANSICION R/M 40-1 1/4"	0.2671	0.015532	8.34	30
1019205	ADAPTADOR TRANSICION R/M 50-1 1/2"	0.3634	0.015532	7.595	20
1019206	ADAPTADOR TRANSICION R/M 63-2"	0.6992	0.022435	7.482	10
1019207	ADAPTADOR TRANSICION R/M 75-2 1/2"	0.8229	0.004725	0.94	1
1019208	ADAPTADOR TRANSICION R/M 90-3"	1.1279	0.004725	1.245	1
1019209	ADAPTADOR TRANSICION R/M 110-4"	2.0426	0.00892	2.23	1



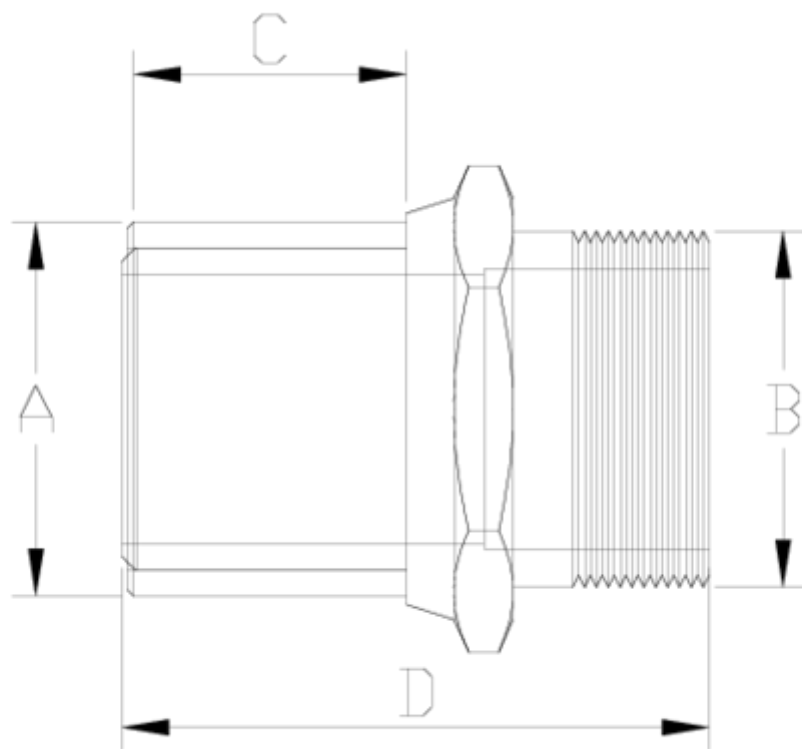

ITEM 167 | Adaptador de transición R/M

Código	f tubo-A-B	Peso (g)	C	D	PN	TIPO ROSCA
19201	20-1/2"	151	33	75	PN16	BSP
19202	25-3/4"	195	33	76	PN16	BSP
19203	32-1"	273	35	80	PN16	BSP
19204	40-1 1/4"	425	39	86	PN16	BSP
19205	50-1 1/2"	528	43	90	PN16	BSP
19206	63-2"	792	47	98	PN16	BSP
19207	75-2 1/2"	1105	59	120	PN16	BSP
19208	90-3"	1591	71	142	PN16	BSP
19209	110-4"	1965	76	148	PN16	BSP





Documentação do Produto



Certificados do Produto

Certificados da Empresa

