




## Eletrofusão / Soldadura por topo

# Toma en carga S/rotativa 360° ITEM 423

| REFERÊNCIA | DESCRIÇÃO                            | Peso líquido | Volume (m³) | contenido.peso bruto | Unidades por lote |
|------------|--------------------------------------|--------------|-------------|----------------------|-------------------|
| 1019240    | TOMA EN CARGA S/ROTATIVA 360° 63-32  | 0.2321       | 0.022435    | 1.88                 | 6                 |
| 1019241    | TOMA EN CARGA S/ROTATIVA 360° 63-63  | 1.4234       | 0.031294    | 7.69                 | 5                 |
| 1019242    | TOMA EN CARGA S/ROTATIVA 360° 90-32  | 0.646        | 0.022435    | 2.478                | 3                 |
| 1019243    | TOMA EN CARGA S/ROTATIVA 360° 90-63  | 1.5014       | 0.031294    | 8.08                 | 5                 |
| 1019244    | TOMA EN CARGA S/ROTATIVA 360° 110-32 | 0.8408       | 0.022435    | 3.01                 | 3                 |
| 1019245    | TOMA EN CARGA S/ROTATIVA 360° 110-63 | 1.142433     | 0.022435    | 3.915                | 3                 |



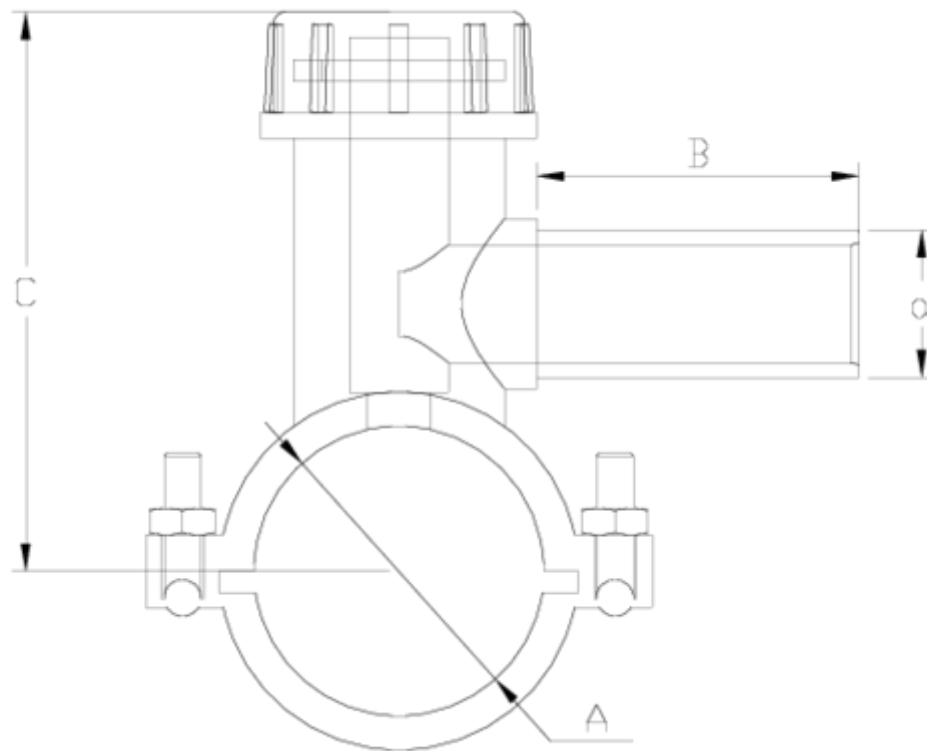

## ITEM 423 | Toma en carga S/rotativa 360°

| Código | f tubo-A-a | Peso (g) | B  | C   | PN   | MEDIDA  |
|--------|------------|----------|----|-----|------|---------|
| 19157  | 63-32      | 715      | 35 | 94  | PN16 | MÉTRICO |
| 19158  | 63-63      | 1455     | 54 | 94  | PN16 | MÉTRICO |
| 19159  | 90-32      | 801      | 35 | 115 | PN16 | MÉTRICO |
| 19160  | 90-63      | 1541     | 54 | 115 | PN16 | MÉTRICO |
| 19161  | 110-32     | 860      | 35 | 125 | PN16 | MÉTRICO |
| 19162  | 110-63     | 1590     | 54 | 125 | PN16 | MÉTRICO |





## Documentação do Produto



## Certificados do Produto

## Certificados da Empresa

