




## PP Compression Fittings

# Codo 90° R/H reforzado

## ITEM 483

| REFERÊNCIA | DESCRIÇÃO                              | Peso líquido | Volume (m³) | contenido.peso bruto | Unidades por lote |
|------------|----------------------------------------|--------------|-------------|----------------------|-------------------|
| 112E129    | Joelho 90° R/fêmea REF. 20-1/2" GRIS   | 0.065541     | 0.02243     | 5.731                | 80                |
| 112E130    | Joelho 90° R/fêmea REF. 25-3/4" GRIS   | 0.094838     | 0.031294    | 8.16                 | 80                |
| 112E131    | Joelho 90° R/fêmea REF. 32-1" GRIS     | 0.128        | 0.031294    | 8.88                 | 65                |
| 112E132    | Joelho 90° R/fêmea REF. 40-1 1/4" GRIS | 0.235        | 0.036816    | 10.02                | 40                |
| 112E133    | Joelho 90° R/fêmea REF. 50-1 1/2" GRIS | 0.348        | 0.063473    | 14.68                | 40                |
| 112E134    | Joelho 90° R/fêmea REF. 63-2" GRIS     | 0.596        | 0.063473    | 15.204               | 24                |
| 112E135    | Joelho 90° R/fêmea REF. 75-2 1/2" GRIS | 0.992        | 0.044603    | 10.75                | 10                |
| 112E136    | Joelho 90° R/fêmea REF. 90-3" GRIS     | 1.74         | 0.031294    | 9.26                 | 5                 |
| 112E137    | Joelho 90° R/fêmea REF. 110-4" GRIS    | 2.423        | 0.022435    | 5.386                | 2                 |
| 112E384    | Joelho 90° R/fêmea REF. 32-3/4" GRIS   | 0            | 0.03129     | 0                    | 65                |



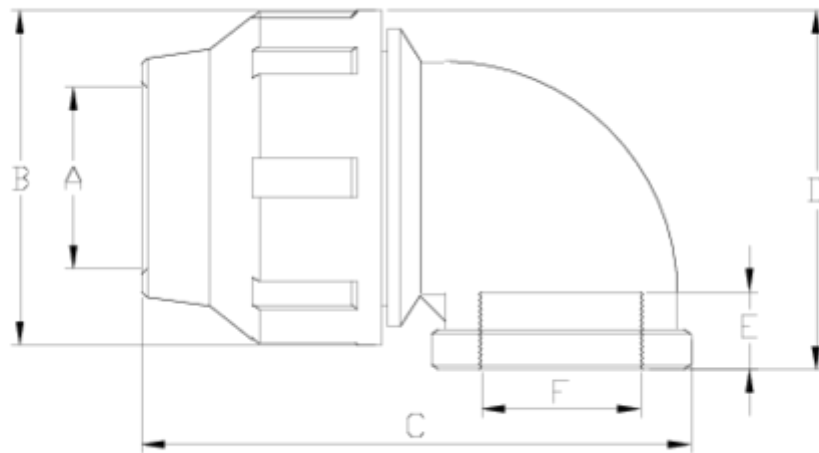

## ITEM 483 | Codo 90° R/H reforzado

| Código | f tubo - F  | Peso (g) | A   | B   | C   | D   | E  | PN   | TIPO ROSCA |
|--------|-------------|----------|-----|-----|-----|-----|----|------|------------|
| 12E129 | 20 - 1/2"   | 64       | 21  | 46  | 87  | 57  | 20 | PN16 | BSP        |
| 12E130 | 25 - 3/4"   | 89       | 26  | 55  | 97  | 65  | 20 | PN16 | BSP        |
| 12E384 | 32 - 3/4"   | 132      | 33  | 64  | 111 | 76  | 20 | PN16 | BSP        |
| 12E131 | 32 - 1"     | 128      | 33  | 64  | 111 | 76  | 22 | PN16 | BSP        |
| 12E132 | 40 - 1 1/4" | 235      | 42  | 76  | 138 | 91  | 25 | PN16 | BSP        |
| 12E133 | 50 - 1 1/2" | 348      | 51  | 91  | 153 | 106 | 25 | PN16 | BSP        |
| 12E134 | 63 - 2"     | 596      | 64  | 109 | 189 | 120 | 29 | PN16 | BSP        |
| 12E135 | 75 - 2 1/2" | 992      | 77  | 133 | 220 | 142 | 34 | PN10 | BSP        |
| 12E136 | 90 - 3"     | 1740     | 92  | 159 | 267 | 165 | 42 | PN10 | BSP        |
| 12E137 | 110 - 4"    | 2423     | 112 | 183 | 303 | 201 | 51 | PN10 | BSP        |





## ITEM 483 | Codo 90° R/H reforzado

---





## Documentação do Produto



## Certificados do Produto

## Certificados da Empresa

