




## Válvulas de esfera 3 vías "Security"

# Válv. de bola 3 vías "Security" salida termofusión FPM ITEM 856



| REFERÊNCIA | DESCRIÇÃO                             | Peso líquido | Volume (m³) | Peso bruto | Unidades por lote |
|------------|---------------------------------------|--------------|-------------|------------|-------------------|
| 111V133    | VALVULA União 3 VIAS L S/TERMO 32 FPM | 0            | 0.0446      | 0          | 4                 |
| 111V135    | VALVULA União 3 VIAS L S/TERMO 50 FPM | 1.6715       | 0.0446      | 4.8129     | 2                 |
| 111V136    | VALVULA União 3 VIAS L S/TERMO 63 FPM | 2.5204       | 0.0446      | 6.5107     | 2                 |
| 111V137    | VALVULA União 3 VIAS L S/TERMO 75 FPM | 4.9478       | 0.04836     | 6.0728     | 1                 |
| 111V173    | V.ENL 3V T S/TERMO 32 FPM             | 0            | 0.0446      | 0          | 4                 |
| 111V175    | V.ENL 3V T S/TERMO 50 FPM             | 1.6715       | 0.0446      | 4.8129     | 2                 |
| 111V176    | V.ENL 3V T S/TERMO 63 FPM             | 2.5204       | 0.0446      | 6.5107     | 2                 |
| 111V177    | V.ENL 3V T S/TERMO 75 FPM             | 4.9478       | 0.03892     | 6.0728     | 1                 |
| 111V498    | V.ENL 3V L S/TERMO 90 FPM             | 0            | 0.03892     | 0          | 1                 |
| 111V908    | V.ENL 3V T S/TERMO 90 FPM             | 0            | 0           | 0          | 1                 |



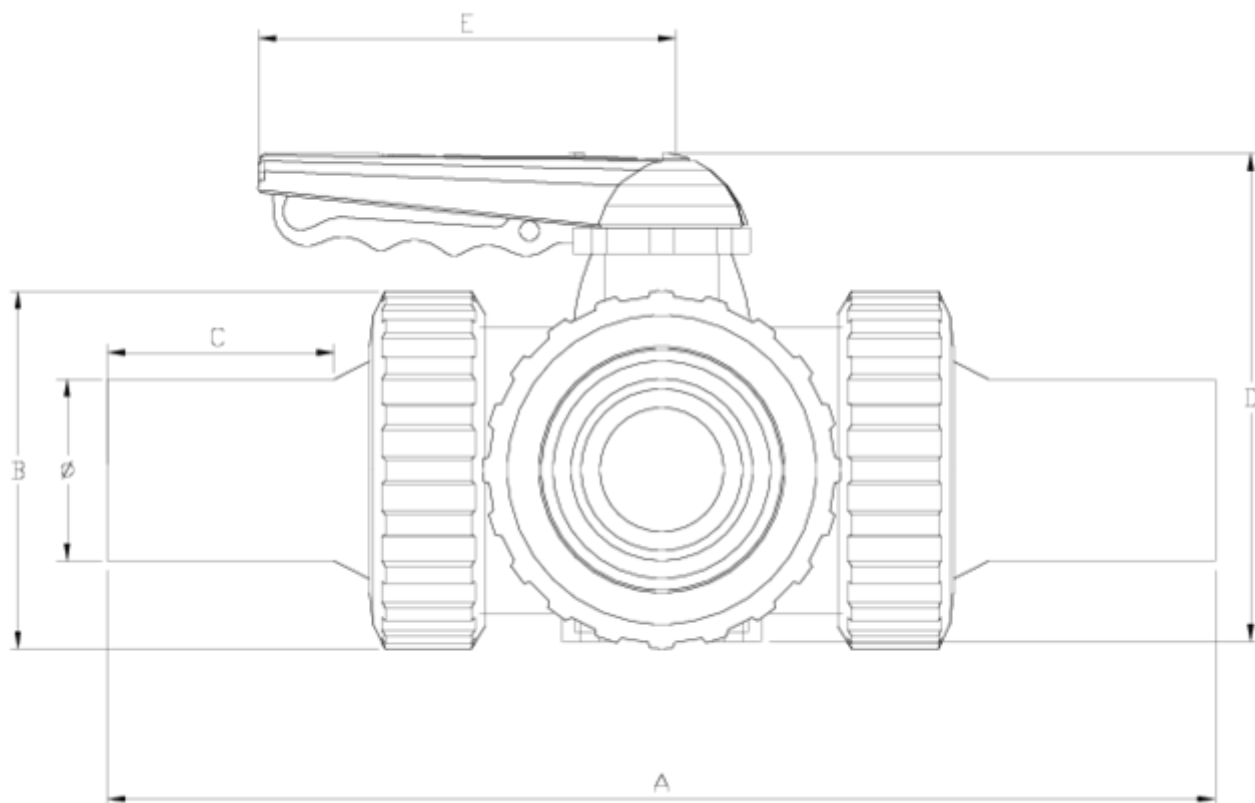

## ITEM 856 | Válv. de bola 3 vías “Security” salida termofusión FPM

| VITON  | f  | PESO (g) | DN | Modelo | A   | B   | C  | D   | E   | PN   | MEDIDA  |
|--------|----|----------|----|--------|-----|-----|----|-----|-----|------|---------|
| 11V133 | 32 | 736      | 25 | L      | 262 | 72  | 70 | 121 | 114 | PN16 | MÉTRICO |
| 11V135 | 50 | 1707     | 40 | L      | 356 | 103 | 79 | 155 | 140 | PN16 | MÉTRICO |
| 11V136 | 63 | 2663     | 50 | L      | 401 | 120 | 89 | 172 | 140 | PN16 | MÉTRICO |
| 11V137 | 75 | 5053     | 65 | L      | 452 | 150 | 95 | 218 | 160 | PN10 | MÉTRICO |
| 11V498 | 90 | =C6+330  | 65 | L      | 460 | 150 | 99 | 218 | 160 | PN10 | MÉTRICO |
| 11V173 | 32 | 732      | 25 | T      | 262 | 72  | 70 | 121 | 114 | PN16 | MÉTRICO |
| 11V175 | 50 | 1697     | 40 | T      | 356 | 103 | 79 | 155 | 140 | PN16 | MÉTRICO |
| 11V176 | 63 | 2645     | 50 | T      | 401 | 120 | 89 | 172 | 140 | PN16 | MÉTRICO |
| 11V177 | 75 | 5013     | 65 | T      | 452 | 150 | 95 | 218 | 160 | PN10 | MÉTRICO |
| 11V908 | 90 | =C11+330 | 65 | T      | 460 | 150 | 99 | 218 | 160 | PN10 | MÉTRICO |





## ITEM 856 | Válv. de bola 3 vías “Security” salida termofusión FPM

---





## Documentação do Produto



## Certificados do Produto

## Certificados da Empresa

