




Válvulas de esfera 3 vías "Security"

SALIDA ENCOLAR ACT. ELEC. 220V. - FPM ITEM 861



REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
111V503	V.E.3V L S/E 32 ACT.ELECT FPM	1.594	0.0446	2.26	1
111V505	V.E.3V L S/E 50 ACT.ELECT FPM	3.4154	0.0446	4.0812	1
111V506	V.E.3V L S/E 63 ACT.ELECT FPM	4.3697	0.0446	5.0355	1
111V507	V.E.3V L S/E 75 ACT.ELECT FPM	7.2488	0.06149	8.0923	1
111V543	V.E.3V T S/E 32 ACT.ELECT FPM	0	0.0446	0	1
111V545	V.E.3V T S/E 50 ACT.ELECT FPM	3.4154	0.0446	4.0812	1
111V546	V.E.3V T S/E 63 ACT.ELECT FPM	4.3697	0.0446	5.0355	1
111V547	V.E.3V T S/E 75 ACT.ELECT FPM	7.2488	0.06149	8.0923	1
111V844	V.E.3V L S/E 40 ACT.ELECT FPM	0	0.0446	0	1
111V848	V.E.3V L S/E 90 ACT.ELECT FPM	0	0.06149	0	1
111V854	V.União 3 VIAS T S/E 40 ACT.ELECT FPM	4.217	0.03129	4.79	1
111V858	V.E.3V T S/E 90 ACT.ELECT FPM	0	0.06149	0	1



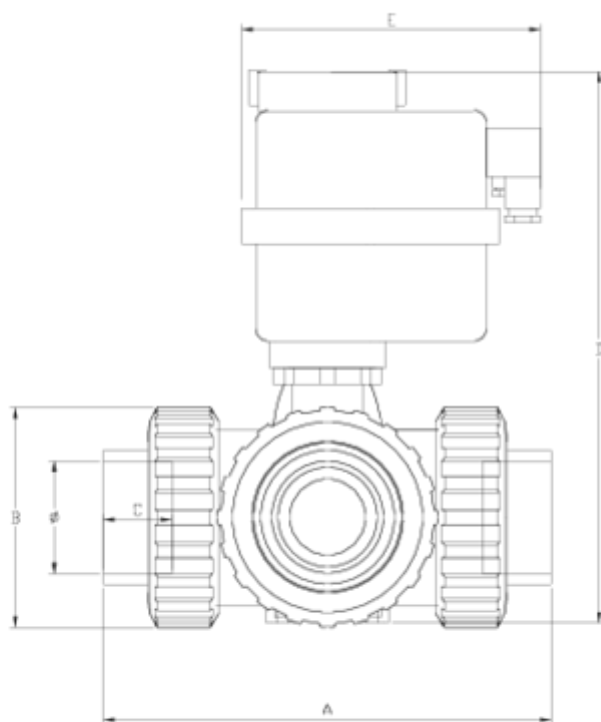

ITEM 861 | SALIDA ENCOLAR ACT. ELEC. 220V. - FPM

VITON	f	Actuador	PESO (g)	DN	Modelo	A	B	C	D	E	PN	MEDIDA
11V503	32	H10	1612	25	L	160	72	22	220	169	PN16	MÉTRICO
11V844	40	H20	=D5-9	40	L	214	103	26	279	177	PN16	MÉTRICO
11V505	50	H20	3453	40	L	216	103	31	279	177	PN16	MÉTRICO
11V506	63	H35	4449	50	L	251	120	38	318	177	PN16	MÉTRICO
11V507	75	H55	7408	65	L	308	150	45	384	177	PN10	MÉTRICO
11V848	90	H55	=D7+309	65	L	=G7+24	150	51	384	177	PN10	MÉTRICO
11V543	32	H10	1608	25	T	160	72	22	220	169	PN16	MÉTRICO
11V854	40	H20	=D11-9	40	T	214	103	26	279	177	PN16	MÉTRICO
11V545	50	H20	3443	40	T	216	103	31	279	177	PN16	MÉTRICO
11V546	63	H35	4431	50	T	251	120	38	318	177	PN16	MÉTRICO





ITEM 861 | SALIDA ENCOLAR ACT. ELEC. 220V. - FPM

11V547	75	H55	7368	65	T	308	150	45	384	177	PN10	MÉTRICO
11V858	90	H55	=D13+309	65	T	=G13+24	150	51	384	177	PN10	MÉTRICO





Documentação do Produto



Certificados do Produto

Certificados da Empresa

