




Válvulas de esfera 3 vías "Security"

SALIDA ENCOLAR ACT. ELÉC. 220V. - PTFE ITEM 857

REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
111V203	V.E.3 VIAS L S/E 32 ACT.ELECT	1.594	0.0446	2.2598	1
111V205	V.E.3 VIAS L S/E 50 ACT.ELECT	3.4801	0.0446	4.21	1
111V206	V.E.3 VIAS L S/E 63 ACT.ELECT	5.446	0.03129	6.019	1
111V207	V.E.3 VIAS L S/E 75 ACT.ELECT	7.2488	0.06149	8.0923	1
111V243	V.E.3 VIAS T S/E 32 ACT.ELECT	1.594	0.0446	2.26	1
111V245	V.E.3 VIAS T S/E 50 ACT.ELECT	3.4154	0.0446	4.0812	1
111V246	V.E.3 VIAS T S/E 63 ACT.ELECT	4.928	0.03129	5.501	1
111V247	V.E.3 VIAS T S/E 75 ACT.ELECT	7.2295	0.03648	7.8235	1
111V764	V.União 3 VIAS L S/E 40 ACT.ELECT	3.4801	0.0446	4.21	1
111V768	V.União 3 VIAS L 90 ACT.ELECT	7.583	0.06149	8.5035	1
111V774	V.E.3 VIAS T S/E 40 ACT.ELECT	3.48	0.0446	0	1
111V778	V.E.3 VIAS T S/E 90 ACT.ELECT	7.7971	0.0446	8.527	1



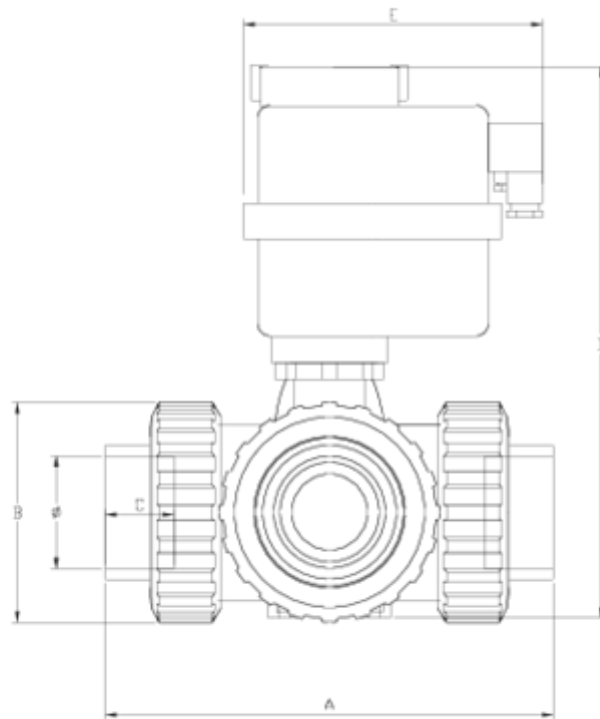

ITEM 857 | SALIDA ENCOLAR ACT. ELÉC. 220V. - PTFE

PTFE	f	Actuador	PESO (g)	DN	Modelo	A	B	C	D	E	PN	MEDIDA
11V203	32	H10	1612	25	L	160	72	22	220	169	PN16	MÉTRICO
11V764	40	H20	=D5-9	40	L	214	103	26	279	177	PN16	MÉTRICO
11V205	50	H20	3453	40	L	216	103	31	279	177	PN16	MÉTRICO
11V206	63	H35	4449	50	L	251	120	38	318	177	PN16	MÉTRICO
11V207	75	H55	7408	65	L	308	150	45	384	177	PN10	MÉTRICO
11V768	90	H55	=D7+309	65	L	=G7+24	150	51	384	177	PN10	MÉTRICO
11V243	32	H10	1608	25	T	160	72	22	220	169	PN16	MÉTRICO
11V774	40	H20	=D11-9	40	T	214	103	26	279	177	PN16	MÉTRICO
11V245	50	H20	3443	40	T	216	103	31	279	177	PN16	MÉTRICO
11V246	63	H35	4431	50	T	251	120	38	318	177	PN16	MÉTRICO





ITEM 857 | SALIDA ENCOLAR ACT. ELÉC. 220V. - PTFE

11V247	75	H55	7368	65	T	308	150	45	384	177	PN10	MÉTRICO
11V778	90	H55	=D13+309	65	T	=G13+24	150	51	384	177	PN10	MÉTRICO





Documentação do Produto



Certificados do Produto

Certificados da Empresa

