




Válvulas de esfera 3 vías "Security"

SALIDA R/H ACT. ELEC. 220V. - FPM ITEM 862

REFERENCIA	DESCRIPCION	Peso líquido	Volumen (m³)	contenido.peso bruto	Unidades por lote
111V513	V.E.3V L R/H 1" ACT.ELECT FPM	0	0.0446	0	1
111V515	V.E.3V L R/H 1 1/2" ACT.ELECT FPM	3.4964	0.0446	4.1622	1
111V516	V.E.3V L R/H 2" ACT.ELECT FPM	4.439	0.0446	5.1048	1
111V517	V.E.3V L R/H 2 1/2" ACT.ELECT FPM	7.3559	0.06149	8.1994	1
111V553	V.E.3V T R/H 1" ACT.ELECT FPM	0	0.0446	0	1
111V555	V.E.3V T R/H 1 1/2" ACT.ELECT FPM	3.4964	0.0446	4.1622	1
111V556	V.E.3V T R/H 2" ACT.ELECT FPM	4.439	0.0446	5.1048	1
111V557	V.E.3V T R/H 2 1/2" ACT.ELECT FPM	7.3559	0.06149	8.1994	1



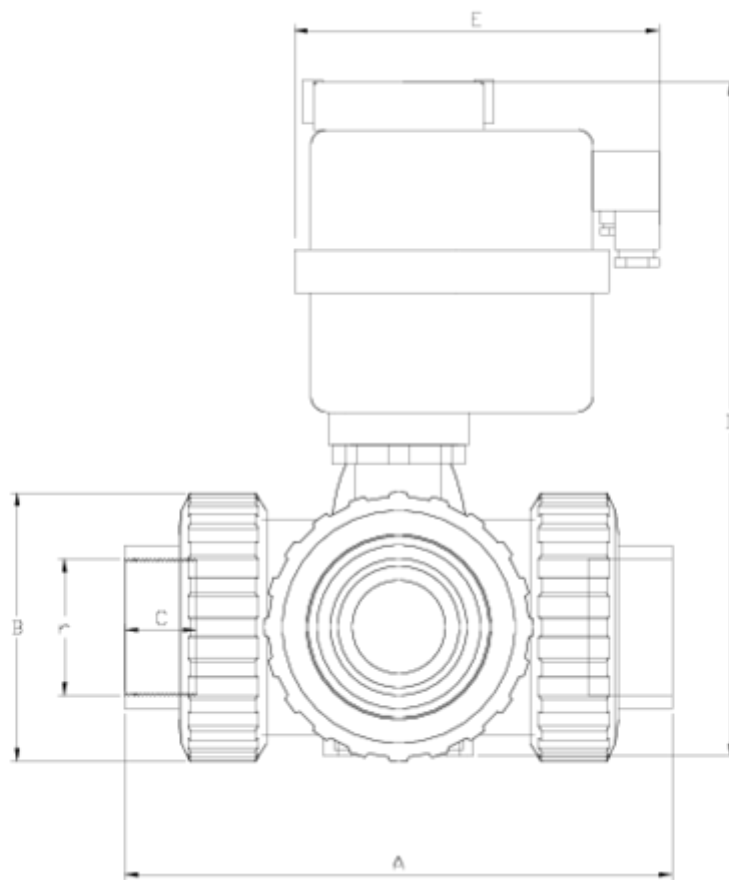

ITEM 862 | SALIDA R/H ACT. ELEC. 220V. - FPM

VITON	r	Actuador	PESO (g)	DN	Modelo	A	B	C	D	E	PN	TIPO ROSCA
11V513	1"	H10	1636	25	L	162	72	23	220	169	PN16	BSP
11V515	1 1/2"	H20	3531	40	L	210	103	33	279	177	PN16	BSP
11V516	2"	H35	4518	50	L	261	120	29	318	177	PN16	BSP
11V517	2 1/2"	H55	7513	65	L	322	150	33	384	177	PN10	BSP
11V553	1"	H10	1632	25	T	162	72	23	220	169	PN16	BSP
11V555	1 1/2"	H20	3521	40	T	210	103	33	279	177	PN16	BSP
11V556	2"	H35	4500	50	T	261	120	29	318	177	PN16	BSP
11V557	2 1/2"	H55	7473	65	T	322	150	33	384	177	PN10	BSP





Documenta????o do Produto



Certificados do Produto

Certificados da Empresa

