




3-Way ball valve

THREADED FEMALE OUTLET - FPM ITEM 854



REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	Gross weight	Unidades lote
111V113	3 WAY V. FEMALE THR. L FPM 1"	0.681	0.03129	3.8579	4
111V115	3 WAY V. FEMALE THR. L FPM 1 1/2"	1.6964	0.0446	4.8669	2
111V116	3 WAY V. FEMALE THR. L FPM 2"	2.539	0.0446	6.5479	2
111V117	3 WAY V. FEMALE THR. L FPM 2 1/2"	4.9559	0.03892	6.0809	1
111V153	3 WAY V. FEMALE THR. T FPM 1"	0.678	0.03129	3.8459	4
111V155	3 WAY V. FEMALE THR. T FPM 1 1/2"	1.6964	0.0446	4.8669	2
111V156	3 WAY V. FEMALE THR. T FPM 2"	2.539	0.0446	6.5479	2
111V157	3 WAY V. FEMALE THR. T FPM 2 1/2"	4.9559	0.03892	6.0809	1



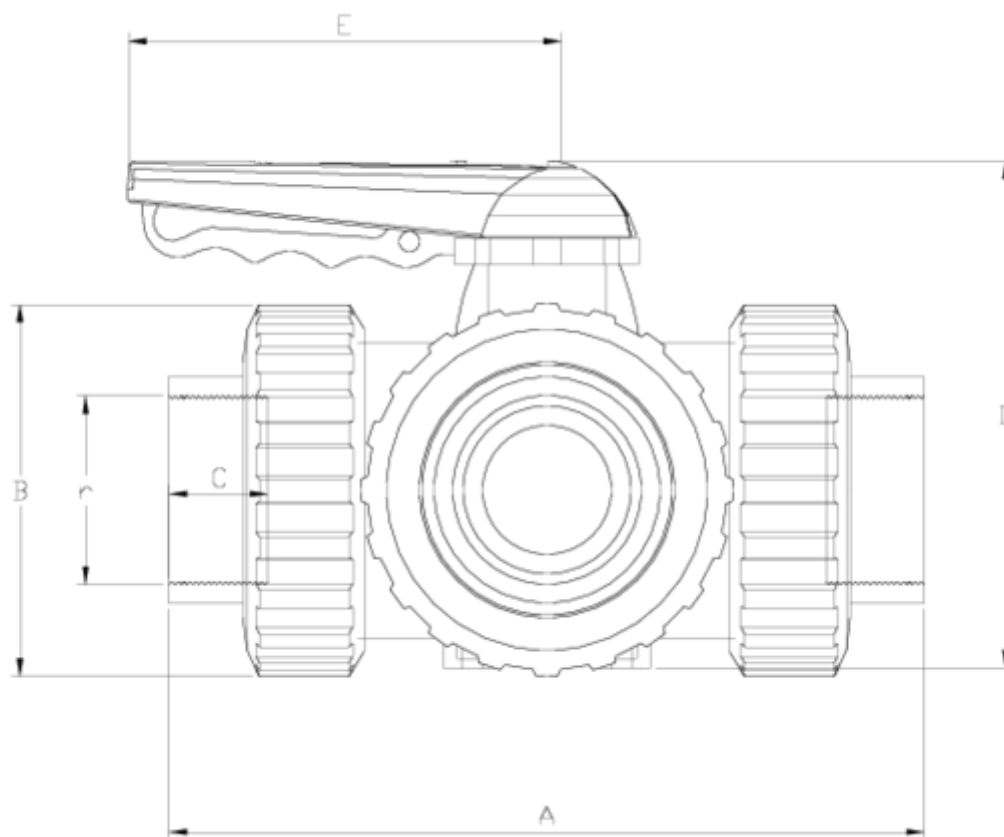

ITEM 854 | THREADED FEMALE OUTLET - FPM

VIT??N	r	PESO (g)	DN	Modelo	A	B	C	D	E	PN	TIPO ROSCA
11V113	1"	736	25	L	162	72	23	121	114	PN16	BSP
11V115	1 1/2"	1731	40	L	210	103	33	155	140	PN16	BSP
11V116	2"	2618	50	L	261	120	29	172	140	PN16	BSP
11V117	2 1/2"	5113	65	L	322	150	33	218	160	PN10	BSP
11V153	1"	732	25	T	162	72	23	121	114	PN16	BSP
11V155	1 1/2"	1721	40	T	210	103	33	155	140	PN16	BSP
11V156	2"	2600	50	T	261	120	29	172	140	PN16	BSP
11V157	2 1/2"	5073	65	T	322	150	33	218	160	PN10	BSP





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es